


Product Bulletin



TEM04.04 Bespoke traction machine


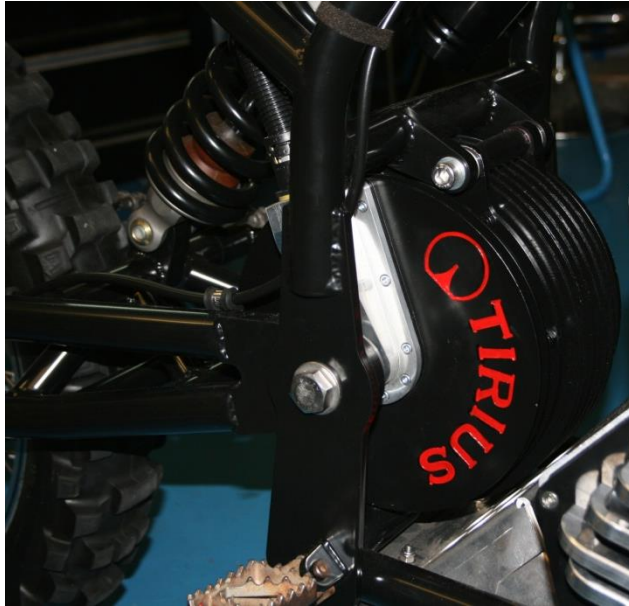


Features

- Low cost design
- Customisable design
- Designed to integrate into YOUR application

- Re-configurable cooling options
- Larger variants by request
- Air cooled

Specification

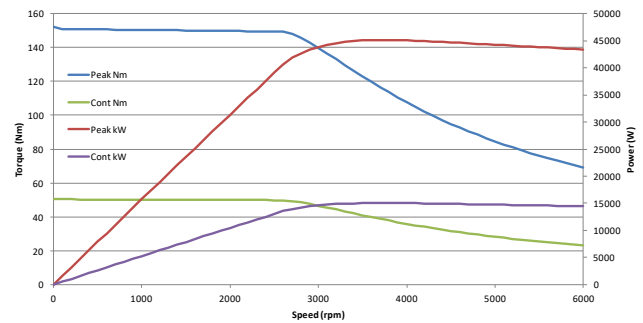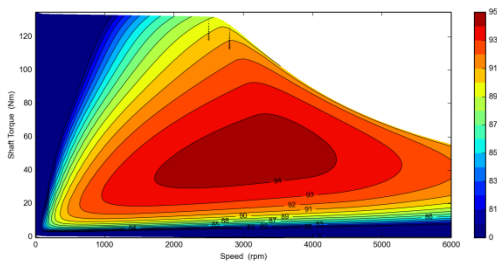

DC Voltage	80-120 Volts
Continuous torque	50 Nm
Peak Torque (20s)	150 Nm
Peak current	500 A
Continuous Power	15 kW
Peak Power (20s)	45 kW
Base speed	3000 rpm
Maximum speed	6000 rpm
Cooling	Air cooled
Insulation class (IEC 60034-1)	H (180 °C)
Weight	17.8 kg